


PLAN VIEW

NOTE: CONCRETE SHALL BE PLACED WITH A MINIMUM DISTANCE OF 12" AROUND THE LIP OF THE ACCESS OPENING RING.

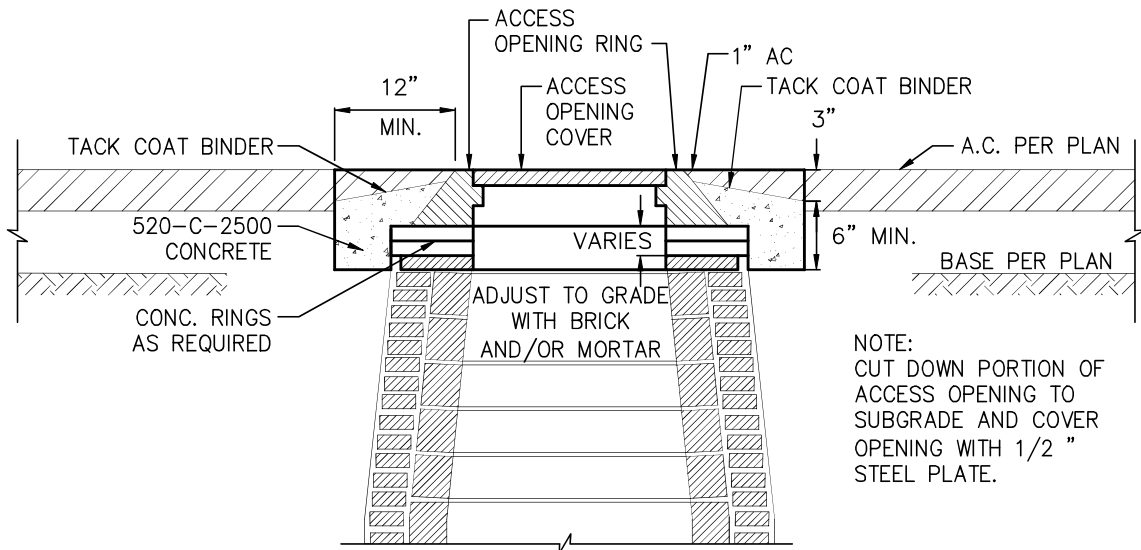

NOTE:
CUT DOWN PORTION OF
ACCESS OPENING TO
SUBGRADE AND COVER
OPENING WITH 1/2 " STEEL PLATE.

CROSS SECTION

DWG NTS

CITY OF GARDENA
DEPARTMENT OF PUBLIC WORKS

APP. BY:

Allan Rigg
CITY ENGINEER

9/16/2024
DATE

TITLE:

ACCESS OPENING
ADJUSTMENT

DESIGNED BY	KK	09/24
DRAWN BY	KK	09/24
CHECKED BY	KK	09/24

DWG. NO. ST-10