



CASE I -

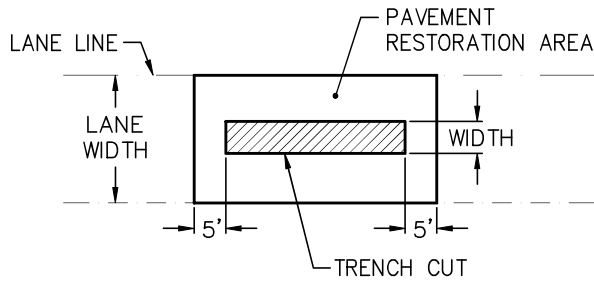


- NOTES:
1. TRENCH CUT IN DIRECTION OF TRAVEL.
 2. COLD MILL 1.5" (MIN.) FROM LANE LINE TO LANE LINE.

CASE II -

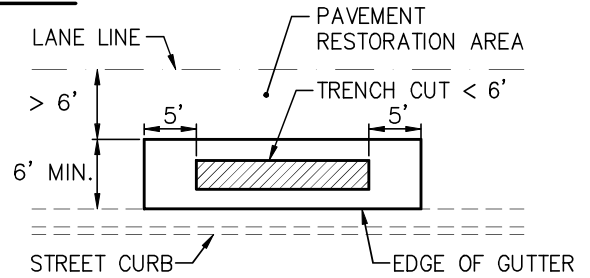


- NOTES:
1. TRENCH CUT DIRECTION ABUTTING EDGE OF GUTTER ON RESIDENTIAL/INDUSTRIAL/COLLECTOR STREET.
 2. FOR TRENCH GREATER THAN 6' IN WIDTH OR FOR A TRENCH THAT EXTENDS BEYOND 6' FROM EDGE OF GUTTER, REPAVING OF FULL LANE(S) WIDTH FOR ENTIRE LENGTH OF TRENCH IS REQUIRED.

CASE III -

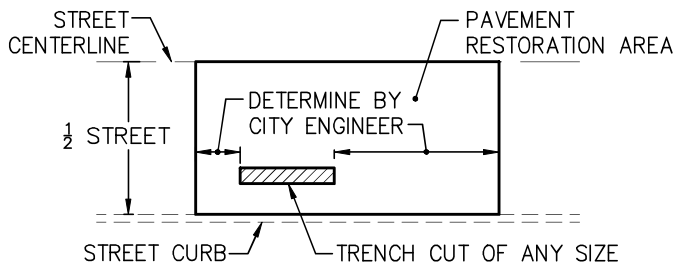


- NOTES:
1. REGARDLESS OF TRENCH SIZE, $\frac{1}{2}$ STREET PAVEMENT RESTORATION IS REQUIRED FOR ALL PUBLIC STREETS UNDER PAVEMENT MORATORIUM.

CASE IV -

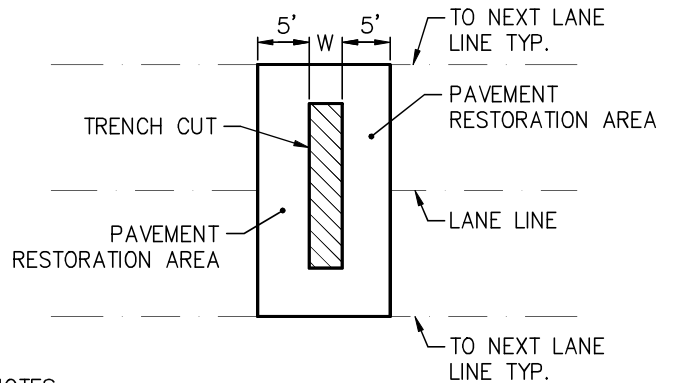

- NOTES:
1. TRENCH CUT NORMAL OR PERPENDICULAR TO DIRECTION OF TRAVEL.
 2. W=1' TRENCH WIDTH MINIMUM.

CASE V -

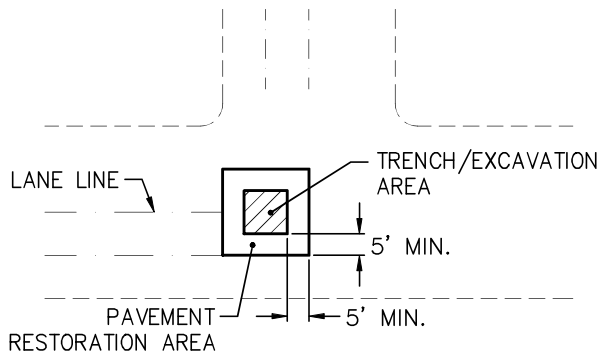

- NOTES:
1. TRENCH CUT OR POT HOLE GRATER THAN 3' IN ANY DIRECTION.

PAVEMENT MORATORIUM

1. 0-5 YEARS, REQUIRE $\frac{1}{2}$ STREET . ALL OTHER STREETS REQUIRE MINIMUM LANE WIDTH.
2. MORATORIUM PERIOD BEGINS AFTER NOTICE OF COMPLETION HAS BEEN FILED. FOR N.O.C. DATES, REFER TO PUBLIC WORKS OFFICE.
3. ANY TRENCHING IN STREETS UNDER MORATORIUM REQUIRES PRIOR APPROVAL FROM THE CITY ENGINEER.
4. ALL PAVEMENT RESTORATION AREA SHALL BE GROUND AND RESURFACED AT A MINIMUM OF 1.5".

DWG NTS

CITY OF GARDENA
DEPARTMENT OF PUBLIC WORKS

APP. BY:

Allan Rigg

9/16/2024

CITY ENGINEER

DATE

TITLE:

STREET ASPHALT PATCHING
FOR TRENCH EXCAVATION

DESIGNED BY

KK 09/24

DRAWN BY

KK 09/24

CHECKED BY

KK 09/24

DWG.
NO.

ST-19